


MX-302AO

AIR-POWERED PRESSURE WASHER

The MX-302AO because it solves the single biggest safety problem facing modern tank cleaning facilities: how to generate 4 GPM at 3,000 PSI of cleaning power without introducing an ignition source. With a 9 HP rotary air motor in place of a combustion engine or electric motor, the MX-302AO eliminates spark hazards entirely — making it the right choice for interior tank wash bays, MEA skid applications, and any environment where solvent vapors, isocyanates, latex residues, or LEL-rated atmospheres may be present.

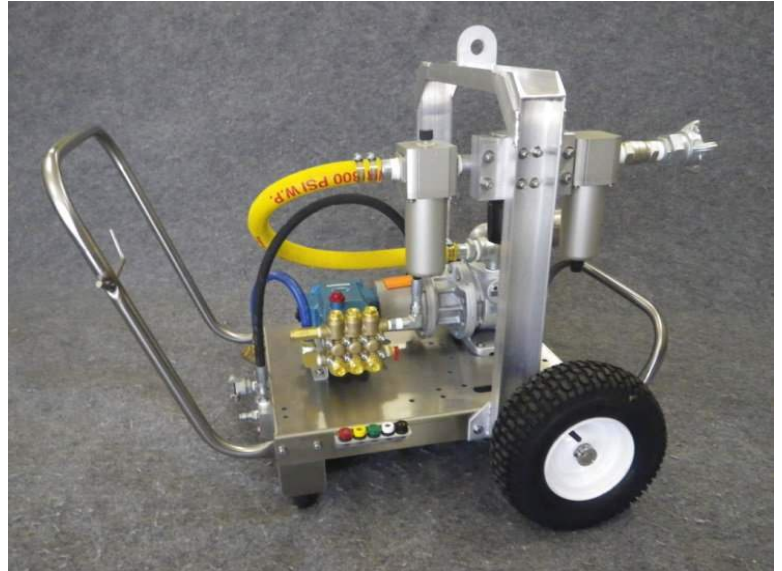

RATING:	4GPM @ 3000PSI
MOTOR:	9HP ROTARY AIR MOTOR
PUMP:	CAT PUMPS CERAMIC PLUNGER TRIPLEX PUMP
FRAME:	STAINLESS STEEL WHEEL KIT WITH PNEUMATIC TIRES
DRIVE:	BELL HOUSING AND FLEX COUPLING
HOSE:	3/8"x50' HOSE W/QC'S, TRIGGER GUN, LANCE, NOZZLES
F R L:	FILTER, REGULATOR, AND LUBRICATOR WITH GAUGE
WEIGHT:	220LBS.
DIMENSIONS:	32"WIDEx48"LONGx34"TALL (INCLUDES LIFT)
WARRANTY:	ONE YEAR WARRANTY ON MAJOR COMPONENTS
AIR REQUIREMENTS:	150-200CFM@80PSI. FOUR LUG CROWFOOT FOR INLET



TANK WASH SOLUTIONS

A JOHN-HENRY COMPANY

800 Central Ave. Jefferson, La 70121 USA

Phone: 800-682-7789 Website: www.tankwashesolutions.com